



## SLCAB AND SLMCAB SELF-REGULATING HEATING CABLE

**Self-Regulating heating cable automatically adjusts heat output based upon surface temperature and ambient conditions. Ideal for freeze protection and low-temperature process maintenance applications.**

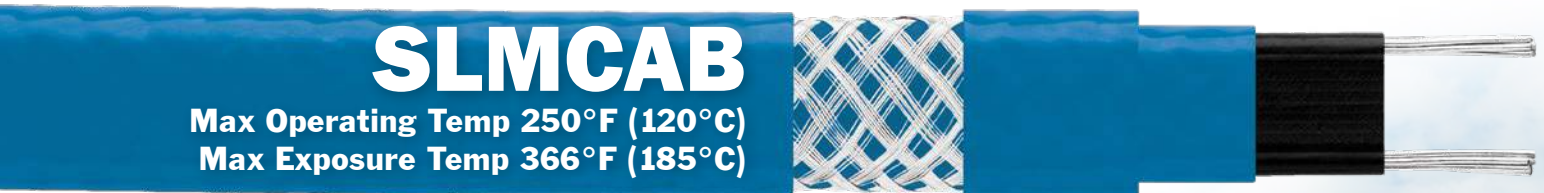

- Up to 15 W/ft (49 W/m)
- Safe to overlap and insulate
- No temperature controller required
- Safe for use in harsh chemical environments
- Can be cut to length and terminated in the field

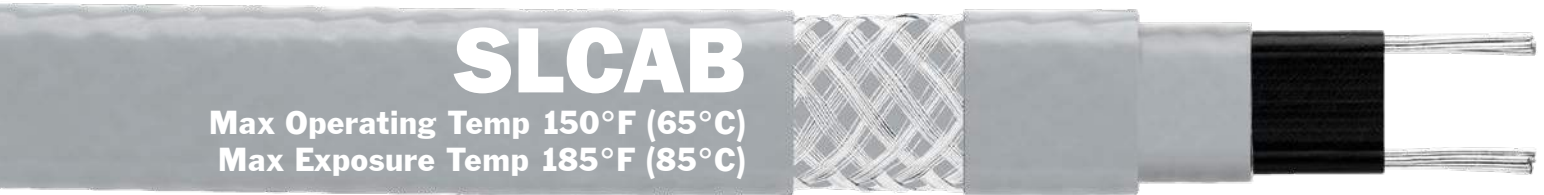

**Available wattages:**

**SLCAB:** 3, 5, 8, 10 W/ft (10, 16, 26, 33 W/m)

**SLMCAB:** 5, 10, 15 W/ft (16, 33, 49 W/m)



**APPROVED FOR USE IN HAZARDOUS-AREA LOCATIONS**



**Ordinary Locations**  
**Hazardous Locations**  
Class I, Division 1 and 2, Groups B, C, D  
Class II, Division 2, Groups F, G  
Class III, Division 1 and 2



**Ordinary Locations**  
130-03 (-G, -W, -S)  
**Hazardous Locations**  
Class I, Division 1 and 2, Groups A, B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III, Division 1 and 2



**Hazardous Locations**  
II 2 GD  
Ex e IICT\* Gb  
Ex tb IIIC T\*°C Db



**Hazardous Locations**  
Ex e IICT\* Gb  
Ex tb IIIC T\*°C Db



**MADE IN THE USA** 

