



### **KIT # 1 330-2LL G** w/ O<sub>2</sub>, CO, & more

**Part no. 400563-3372-71 \$ Call**

Kit includes:

- 330-2 LL analyzer with enhanced Graphics
- O<sub>2</sub> (0-21%)
- CO (0-8,000 ppm H<sub>2</sub> compensated) w/ auto dilution to 30,000 ppm
- Flue Temperature, Draft & Pressure
- Zero function with probe in stack
- 12+probe: Max 932°F with Thermocouple and 7ft hose
- AC power supply and extra rechargeable Li-Ion Battery
- Extra particulate filters and rugged service case

**Note: Bluetooth option- add \$120 to kit. Must be ordered at time of initial order. Cannot be upgraded later**

### **Kit # 2 330-2LL G** w/ O<sub>2</sub>, CO, NO, & more

**Part no. 400563-3372 \$ Call**

Kit includes all components Kit #1 above

**PLUS:**

- NO (0-3000 ppm, NO<sub>x</sub> calculated w/ % NO<sub>2</sub> addition, NO<sub>x</sub> corrected to user-defined O<sub>2</sub> reference.

**Note: for Bluetooth option- add \$120 to Kit. Must be ordered at time of initial order. Cannot be upgraded later**

**4-year Warranty!**  
w/ long life O<sub>2</sub> and CO Sensors


### **Amazing Features!**

- Intuitive Graphic Display
- Simple graphics alert you when parameters are out of range
- Long Life Sensors w/ over-range protection
- Measure CO up to 30,000 ppm (w/ standard dilution system)
- Instrument diagnostics & quick leak check at the touch of a button
- On-board memory to ½ million measurements
- 20 Selectable Fuels with 10 user defined fuels
- Calculations: CO<sub>2</sub>, Efficiency, Excess Air, CO Air free,
- Differential Pressure
- Differential temperature (with optional probes)
- Gas Pipe testing : Pressure drop , pipe commissioning, and more:
- Gas Leak w/optional probe
- Temp range -40° to 2,192°F
- USB connectivity and more




### **A Graphic is worth a 1000 words!**

**Bad or unsafe combustion .** Quickly see where combustion parameters are over defined limits and not within acceptable range. User-defined parameters lets you pin-point the desired ranges  
**Combustion not acceptable -** Both O<sub>2</sub> and CO measurements are out of range  
**High Loss .** The O<sub>2</sub> concentration is over recommended ranges. System is not running efficiently.

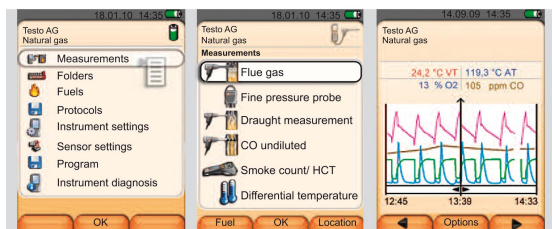

Easy operation with simple icons and intuitive menus.

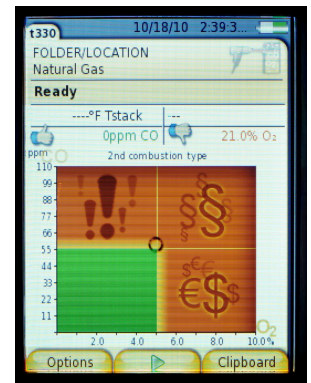

### **Popular Options and Upgrades**

Accessories (part #)	Price	Sensors (part #)	Price	Probes & Hoses (part #)	Price
EasyHeat Software (0554 3332) USB Cable (0449 0047)	\$ Call \$ Call	NO upgrade sensor 0-3000 ppm (0554 2151)	\$Call	13+hi-temp (1832°F) probe tube shaft (0554 8764)	\$ Call
IR printer (0554 0549) printer paper (0554 0568)	\$ Call \$ Call	Combustion Air Temp probe 2.4% w/ 13qcable (0600 9797)	\$ Call	28+hi temp (1832°F) probe tube shaft (0554 8765)	\$ Call
Bluetooth printer (0554 0553) (Must have Bluetooth upgrade in analyzer - see kit above)	\$ Call	Gas Leak Probe (0632 3330)	\$ Call	9qextension hose (max 2 hoses) (0554 1202)	\$ Call
Rechargeable Li-ion battery (0554 0107) Charging Station (0554 1103)	\$ Call \$ Call	CO Ambient Probe (0632 3331)	\$ Call	Particle Filters- (0554 3385)	\$ Call

© Testo Inc. 2011

**Prices subject to change**